


Code RS1.8

Refurbishment Exposed Roof

Multival Remake system

Premium quality, high performance bituminous warm roof refurbishment system for exposed technical flat roofs. The cap sheet is available with reflective REFLEVAL surfacing for Cool Roof or other colours for architectural purposes.

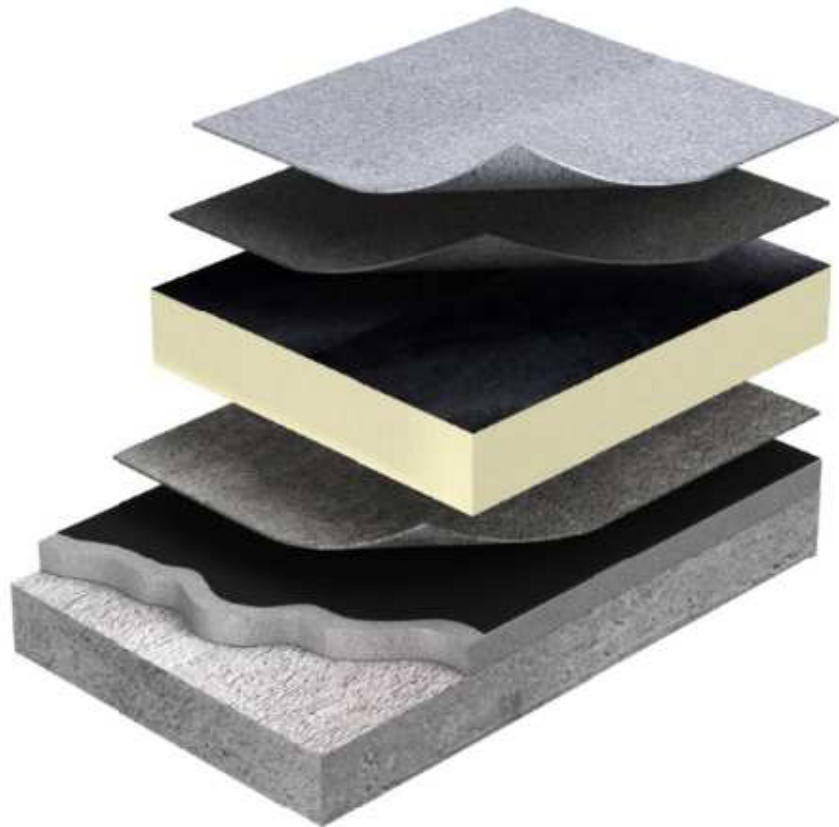

This system is for refurbishment build projects. Suitable for all decks.

| | |
|---------------------------|-------------------------|
| Build-up | 1-layer system |
| Slope | 1% |
| System | Torch applied Cap Sheet |
| Type | Refurbishment roofs |
| Deck | All decks |
| External Fire performance | BRoof T2 (see note 2) |



| | Build-up | mm |
|---|--|-----|
| 5 | Waterproofing, Single layer Cap sheet APAO/SBS modified bitumen membrane, MULTIVAL REMAKE , fully torch applied over existing bitumen membrane previously treated with bituminous primer, VERVAL PRIMER 0,3 L/m ² | 5,5 |
| 4 | Waterproofing, existing bitumen membrane | |
| 3 | Insulation, existing insulation | |
| 2 | Vapour barrier, existing membrane | |
| 1 | Structural - Concrete deck and concrete screed | |

Note (1) Deck can be also wood or metal deck with approved structural resistance.
 (2) In case of high external fire performance Multival Remake can be substituted with **Professional 20 Mineral Fire Defence**

Method of Application

- Clean the existing surface thoroughly free from loose materials, laitance, dust, oils and curing agents
- Prepare horizontal surface and vertical upstands with Verval Primer 0,3L/m² and allow to dry,
- Install Extragum Special 3mm base layer 250 mm wide strip band along all perimeter, skylights and other structure upstands, fully torched on substrate,
- Install Multival Remake (or Professional Fire Defence) cap sheet fully torched over existing bituminous membrane. Side lap 100mm / head lap 150mm, head joints 1m staggered,
- Complete vertical upstands with Multival Remake (or Professional Fire Defence) fully torch applied,
- Secure all joints by torching.