


Elastoval 2-layer system with asphalt

Premium quality, high performance bituminous system for parking with asphalt wearing course.

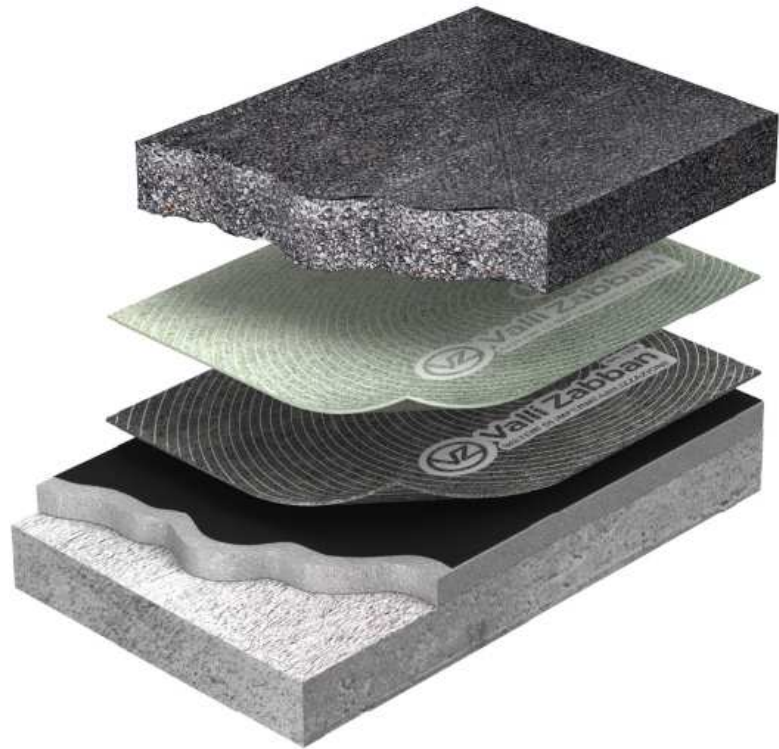

This system is for new build projects. Suitable for concrete decks.

Build-up	2-layer system
Slope	1%
System	Torch applied system
Type	New roofs
Deck	Concrete deck
Protection	Asphalt wearing course



Elastoval 2-layer system with asphalt

	Build-up	mm
6	Asphalt wearing course	250
5	Waterproofing, top layer sheet SBS modified bitumen membrane, ELASTOVAL 4PL SUPER 33 , fully torch applied	4,0
4	Waterproofing, base layer sheet SBS modified bitumen membrane, ELASTOVAL 4PL SUPER 33 , fully torch applied	4,0
3	Bituminous primer, VERVAL PRIMER 0,3 L/m ²	0,1
2	Concrete screed, slope 1%	
1	Structural - Concrete deck	

Note

Method of Application

- Clean the concrete surface thoroughly free from loose materials, laitance, dust, oils and curing agents
- Prepare horizontal surface and vertical upstands with Verval Primer and allow to dry,
- Install Elastoval 4PL Super 33 base layer fully torched concrete screed. Side lap 100mm / head lap 100mm, head joints 1m staggered
- Install Elastoval 4PL Super 33 top layer fully torched concrete screed. Side lap 100mm / head lap 100mm, head joints 1m staggered
- Secure all joints by torching.
- Install asphalt wearing course